

QBIG BENEFIT OVERFLOW PIPE CONNECTION



ALBIXON.com

QBIG BENEFIT – OVERFLOW

OVERFLOW connection package

(3C02-01-043)

90° elbow D50

1BP07-02-068



PVC pipe D50

1BP07-01-010



Grifon PVC adhesive

1BM04-01-005



Step 1

Cut the pipe to the required length according to the desired dimensions.



Step 2

Check that the pipe is clean and dry. Then apply Grifon adhesive evenly to the outer surface of the pipe within 1 to 2 cm of its end. Do the same on the inside of the 90 D50 elbow. Follow the instructions on the adhesive packaging.



Step 3


Immediately after applying the adhesive, insert the pipe into the elbow or another pipe and fix the joint in the desired position.

Pipe connection at the stairs on the shorter wall of the pool

Option A – technological shaft/wall located opposite the pool stairs



90° elbow D50

1BP07-02-068

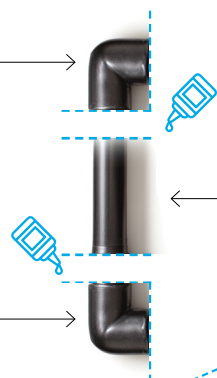

PVC pipe D50

1BP07-01-010

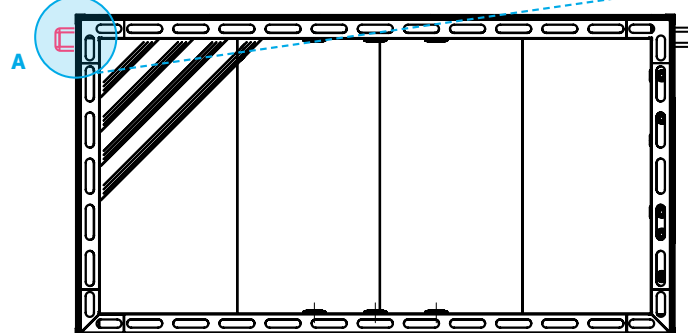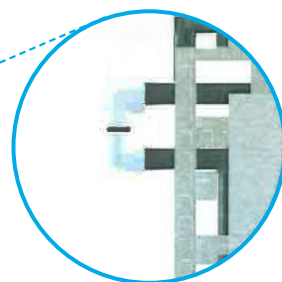

Technological shaft A

Pipe connection opposite the stairs on the shorter wall of the pool


Varianta B – technologická šachta/stěna umístěna na kratší straně u schodů bazénu




PVC pipe D50

1BP07-01-010

B

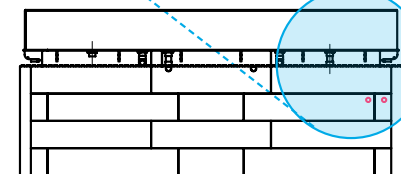


Technological shaft B

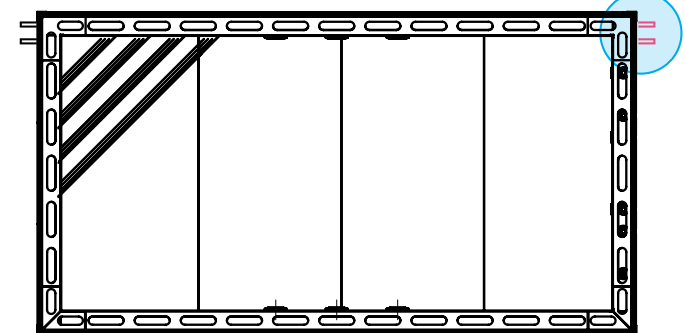

90° elbow D50

1BP07-02-068

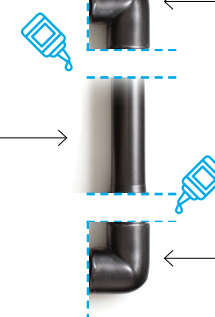

90° elbow D50

1BP07-02-068

B